


SERVICE FITTINGS


POLY CONNECTORS & REDUCING CONNECTORS

waterfit

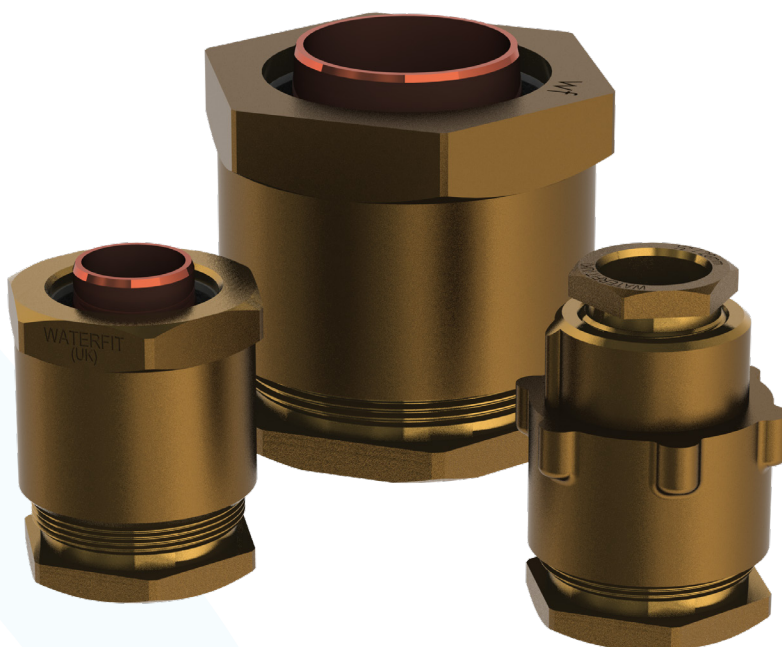


DIMENSIONS

PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
20mm poly connector	COM0307	49 x 36 x 36	0.2
25mm poly connector	COM0308	51 x 46 x 46	0.3
32mm poly connector	COM0309	57 x 56 x 56	0.5
50mm poly connector	COM0310	77 x 70 x 70	1.10
63mm poly connector	COM0313	80 x 88 x 88	1.6




PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
25mm x 20mm poly connector	REM0317	64 x 84 x 84	0.4
32mm x 20mm poly connector	REM0318	68 x 84 x 84	0.5
32mm x 25mm poly connector	REM0319	68 x 84 x 84	0.5
50mm x 20mm poly connector	REM0320	72 x 84 x 84	1.0
50mm x 25mm poly connector	REM0321	74 x 84 x 84	1.1
50mm x 32mm poly connector	REM0322	74 x 84 x 84	1.2
63mm x 50mm poly connector	REM0326	97 x 84 x 84	1.9




BILL OF MATERIALS

- 1 Poly Connector Body**
Material: BS EN 1982:2017 CC491K
- 2 Friction Washer**
Material: Polypropylene (WRAS Approved)
- 3 Compression Rubber**
Material: EPDM (WRAS Approved)
- 4 Copper Insert**
Material: BS EN 1982:2017 CW024A
- 5 Thrust Nut**
Material: BS EN 1982:2017 CC491K

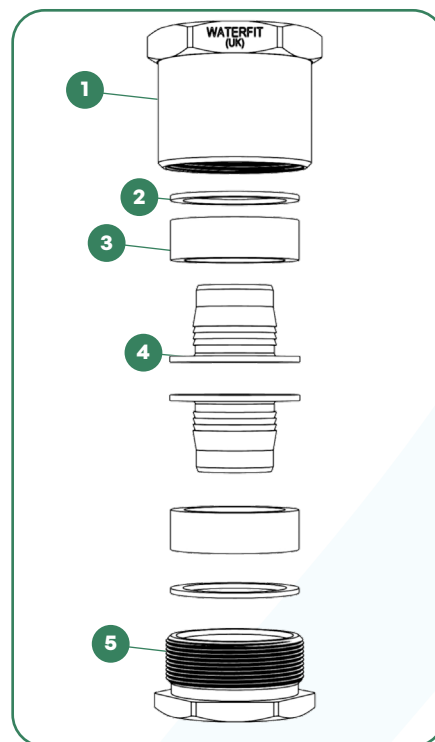

BILL OF MATERIALS

- 1 Thrust Nut**
Material: BS EN 1982:2017 CC491K
- 2 Friction Washer**
Material: Polypropylene (WRAS Approved)
- 3 Compression Rubber**
Material: EPDM (WRAS Approved)
- 4 Copper Insert**
Material: BS EN 1982:2017 CW024A
- 5 Poly Reducing Connector Body**
Material: BS EN 1982:2017 CC491K

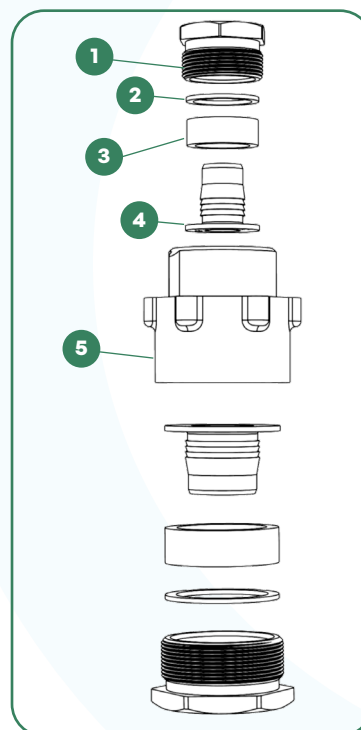

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- Threads to BS 84