





DIMENSIONS

VARIATION PUSHFIT	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
25mm Pushfit c/w Base & 800mm Rigid Tube	MK73055	866 x 280 x 221	2.90
25mm Pushfit c/w Base, 800mm Rigid Tube & Combi Lid	MK72893	893 x 285 x 285	5.88
25mm Pushfit c/w Base, 800mm Rigid Tube & Plastic Lid	MK73622	916 x 280 x 250	3.84
25mm Pushfit c/w Base & 450-750mm Telescopic Tube	MK73571	474 x 280 x 221	2.86
25mm Pushfit c/w Base, 450-750mm Telescopic Tube & Combi Lid	MK73570	501 x 285 x 285	5.83
VARIATION TAILS			
25mm MDPE Tails c/w Base & 800mm Rigid Tube	MK73275	866 x 476 x 221	2.95
25 mm MDPE Tails c/w Base & 450-750mm Telescopic Tube	MK73529	474 x 476 x 221	2.91
VARIATION FEMALE IRON			
¾" Female Iron c/w Base & 800mm Rigid Tube	MK72875	866 x 264 x 221	2.88
¾" Female Iron c/w Base & 450-750mm Telescopic Tube	MK73681	474 x 264 x 221	2.84

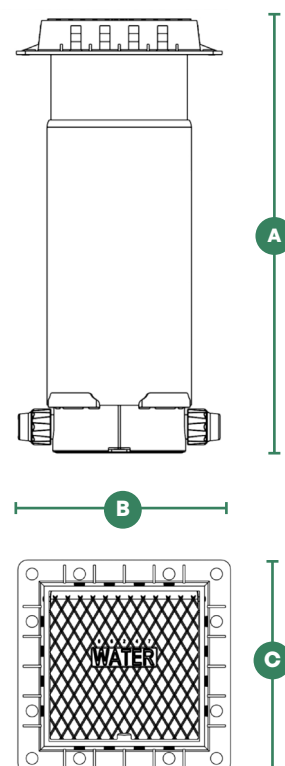

BILL OF MATERIALS - METERFIT - PUSHFIT OUTLETS

- | | | |
|--|--|--|
| 1 Meterfit Pushfit Outlet
Material: Acetal (WRAS Approved) | 9 Meterfit Body
Material: Acetal (WRAS Approved) | 17 Grip Ring x 2
Material: Acetal (WRAS Approved) |
| 2 1.1/2" BSP Full Flow Cap
Material: Acetal (WRAS Approved) | 10 Ball
Material: Acetal (WRAS Approved) | 18 Pipe Liner x 2
Material: Acetal (WRAS Approved) |
| 3 O-Ring
Material: Nitrile (WRAS Approved) | 11 Ball Seal x 2
Material: Hytrel (WRAS Approved) | 19 Nut x 2
Material: Nylon
(not in contact with water supply) |
| 4 Check Valve Assembly (See 21-23)
Material: Various (WRAS Approved) | 12 O-Ring x 2
Material: Nitrile (WRAS Approved) | 20 Pushfit Housing x 2
Material: Acetal (WRAS Approved) |
| 5 Check Valve Seating Washer
Material: Nitrile (WRAS Approved) | 13 O-Ring x 2
Material: Nitrile (WRAS Approved) | 21 Check Valve Retainer Body
Material: Acetal (WRAS Approved) |
| 6 Crutch
Material: Acetal (WRAS Approved) | 14 Meterfit Pushfit Inlet
Material: Acetal (WRAS Approved) | 22 OV20 Check Valve
Material: Various (WRAS Approved) |
| 7 Spindle
Material: Acetal (WRAS Approved) | 15 O-Ring x 2
Material: Nitrile (WRAS Approved) | 23 Check Valve Retainer Bush
Material: Acetal (WRAS Approved) |
| 8 O-Ring x 2
Material: Nitrile (WRAS Approved) | 16 Thrust Washer x 2
Material: Acetal (WRAS Approved) | Base |
| | | 24 Material: Recycled Polypropylene
(not in contact with water supply) |

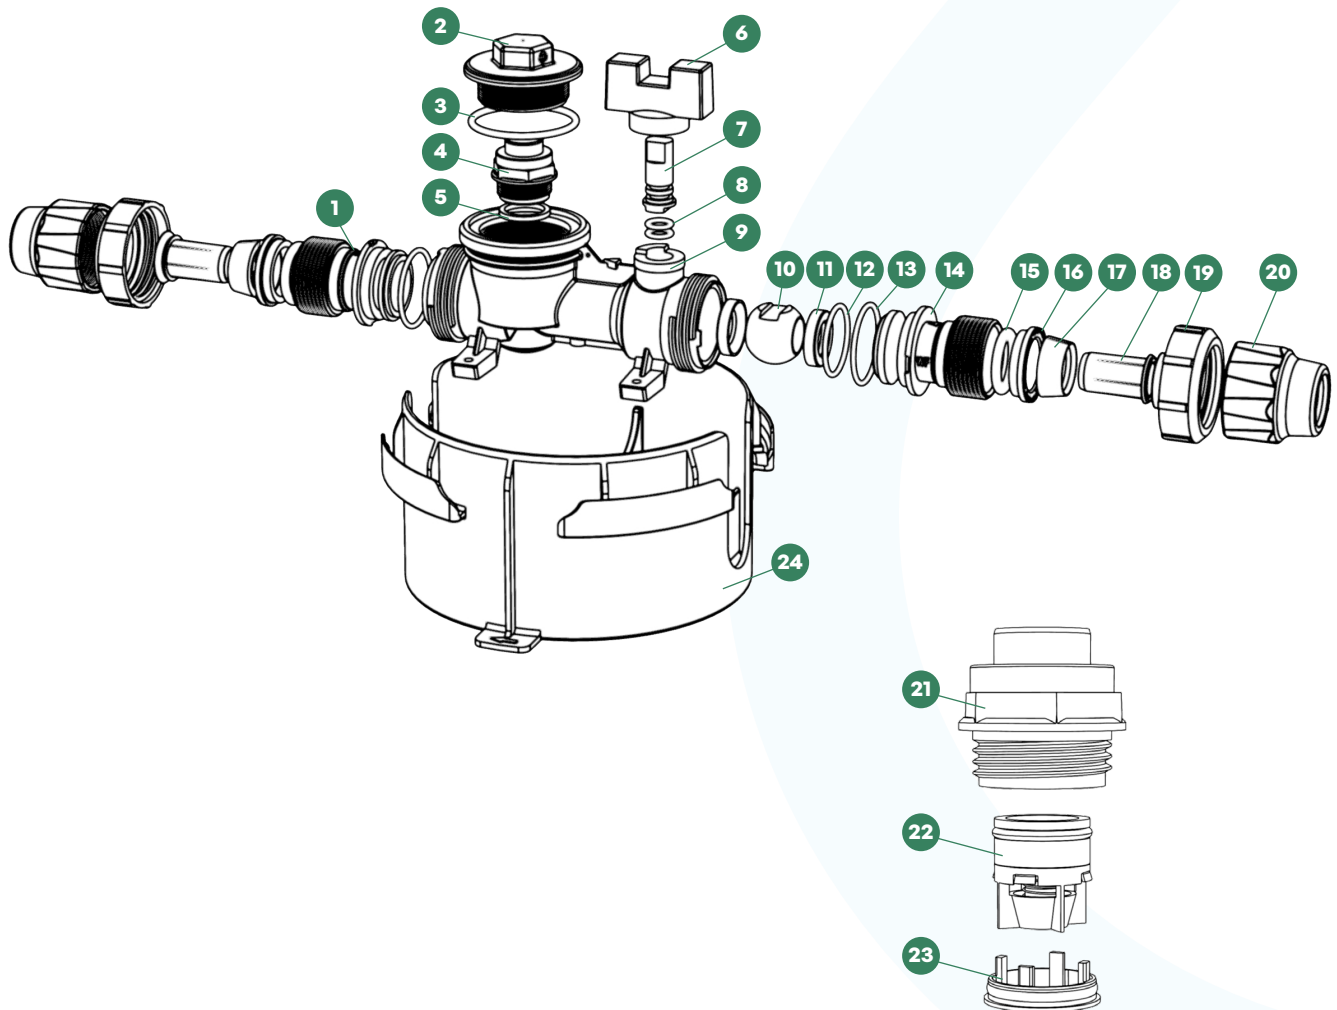

SPECIFICATIONS


- Working pressure 12.5bar
- Cold water use only

APPROVALS

- WRAS Approval 1910055

BILL OF MATERIALS - METERFIT - FEMALE IRON OUTLETS

- | | | |
|--|---|--|
| <p>1 Meterfit Female Iron Outlet
Material: Acetal (WRAS Approved)</p> <p>2 1.1/2" BSP Full Flow Cap
Material: Acetal (WRAS Approved)</p> <p>3 O-Ring
Material: Nitrile (WRAS Approved)</p> <p>4 Check Valve Assembly (See 16-18)
Material: Various (WRAS Approved)</p> <p>5 Check Valve Seating Washer
Material: Nitrile (WRAS Approved)</p> <p>6 Crutch
Material: Acetal (WRAS Approved)</p> <p>7 Spindle
Material: Acetal (WRAS Approved)</p> | <p>8 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>9 Meterfit Body
Material: Acetal (WRAS Approved)</p> <p>10 Ball
Material: Acetal (WRAS Approved)</p> <p>11 Ball Seal x 2
Material: Hytrel (WRAS Approved)</p> <p>12 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>13 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>14 Meterfit Female Iron Inlet
Material: Acetal (WRAS Approved)</p> | <p>15 Nut x 2
Material: Nylon
(not in contact with water supply)</p> <p>16 Check Valve Retainer Body
Material: Acetal (WRAS Approved)</p> <p>17 OV20 Check Valve
Material: Various (WRAS Approved)</p> <p>18 Check Valve Retainer Bush
Material: Acetal (WRAS Approved)</p> <p>Base
Material: Recycled Polypropylene
(not in contact with water supply)</p> |
|--|---|--|

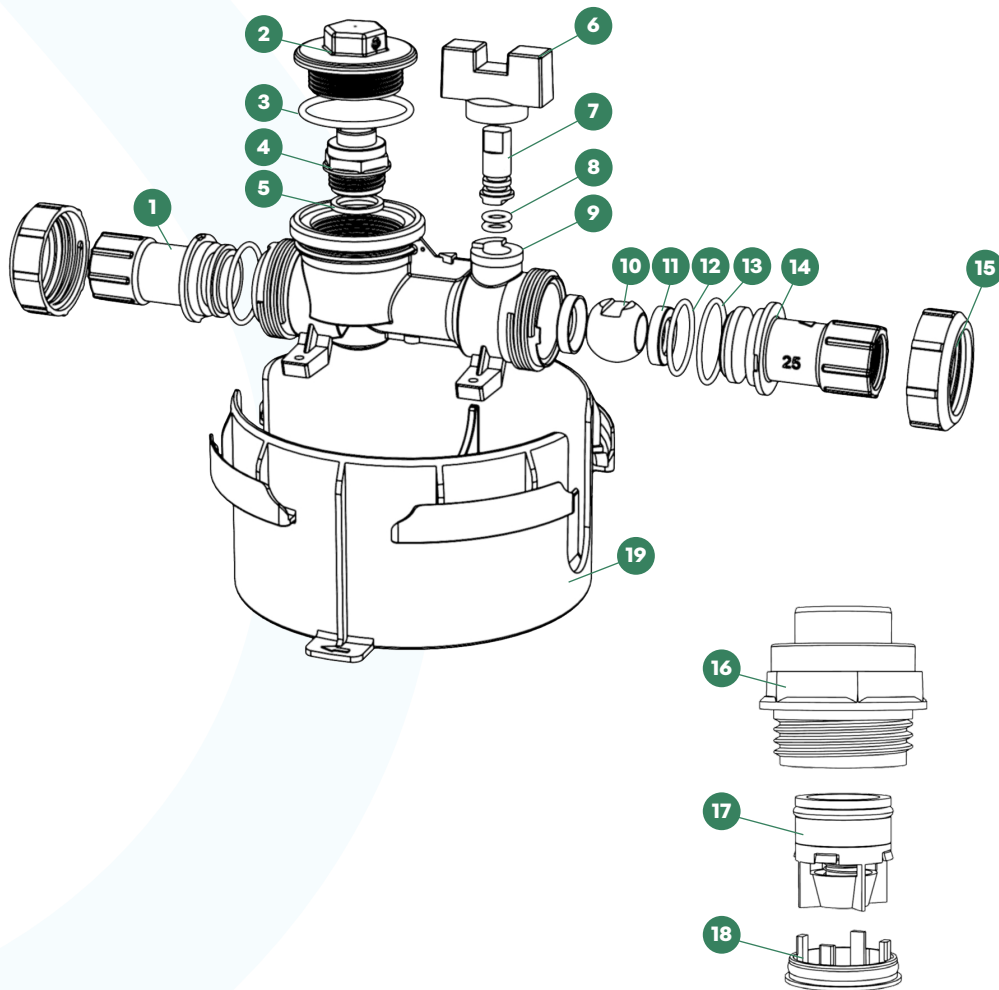

SPECIFICATIONS


- Working pressure 12.5bar
- Cold water use only

APPROVALS

- WRAS Approval 1910055

BILL OF MATERIALS - METERFIT - MDPE TAIL OUTLETS

- | | | |
|--|---|--|
| <p>1 Meterfit MDPE Tail Outlet
Material: Acetal (WRAS Approved)</p> <p>2 1.1/2" BSP Full Flow Cap
Material: Acetal (WRAS Approved)</p> <p>3 O-Ring
Material: Nitrile (WRAS Approved)</p> <p>4 Check Valve Assembly (See 16-18)
Material: Various (WRAS Approved)</p> <p>5 Check Valve Seating Washer
Material: Nitrile (WRAS Approved)</p> <p>6 Crutch
Material: Acetal (WRAS Approved)</p> <p>7 Spindle
Material: Acetal (WRAS Approved)</p> | <p>8 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>9 Meterfit Body
Material: Acetal (WRAS Approved)</p> <p>10 Ball
Material: Acetal (WRAS Approved)</p> <p>11 Ball Seal x 2
Material: Hytrel (WRAS Approved)</p> <p>12 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>13 O-Ring x 2
Material: Nitrile (WRAS Approved)</p> <p>14 Meterfit MDPE Tail Inlet
Material: Acetal (WRAS Approved)</p> | <p>15 Nut x 2
Material: Nylon
(not in contact with water supply)</p> <p>16 Check Valve Retainer Body
Material: Acetal (WRAS Approved)</p> <p>17 OV20 Check Valve
Material: Various (WRAS Approved)</p> <p>18 Check Valve Retainer Bush
Material: Acetal (WRAS Approved)</p> <p>Base
19 Material: Recycled Polypropylene
(not in contact with water supply)</p> |
|--|---|--|

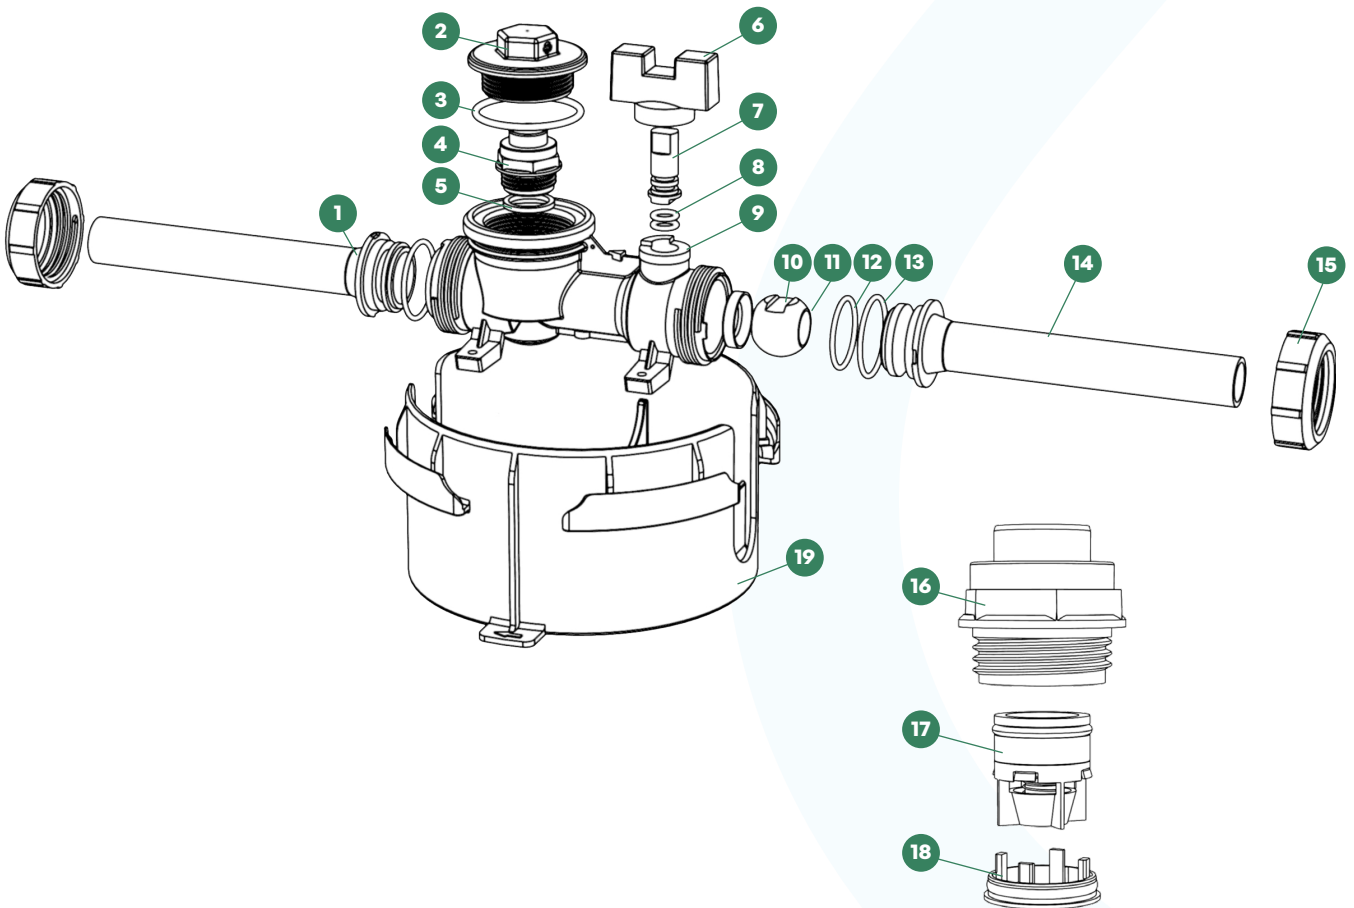

SPECIFICATIONS

- Working pressure 12.5bar
- Cold water use only

APPROVALS

- WRAS Approval 1910055