


MULTIPOINT MANIFOLDS


WITH 1 1/2" BSP INLET & 3/4" BSP OUTLETS

waterfit

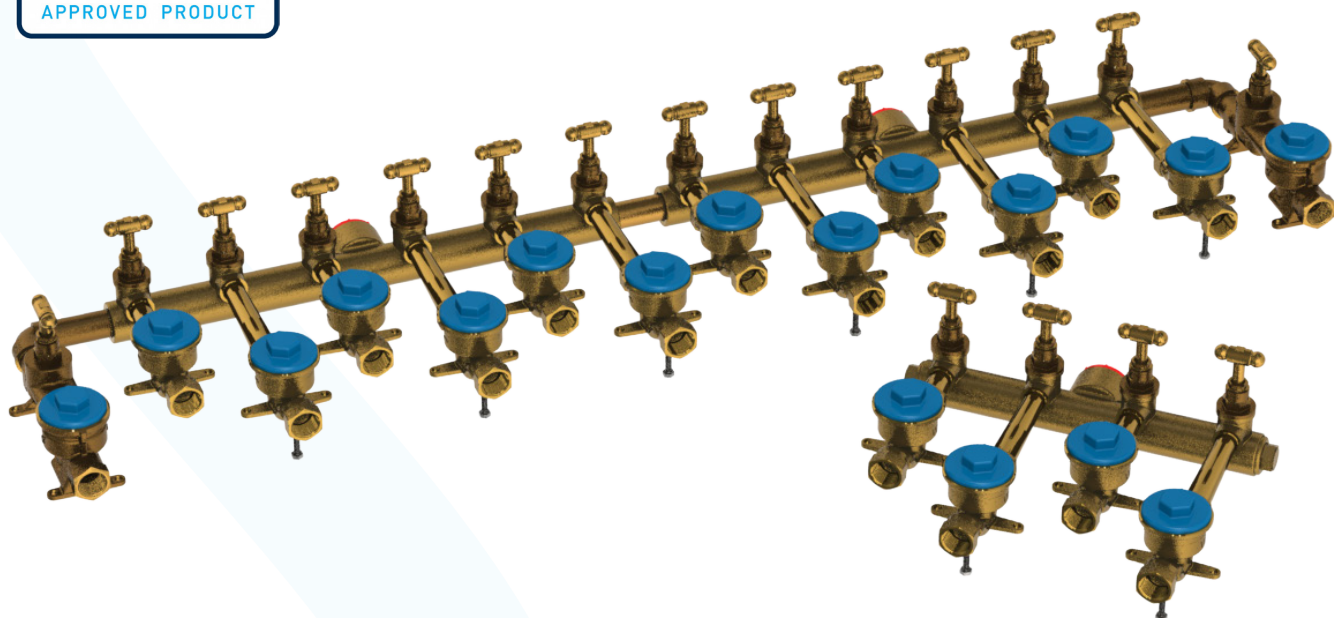


DIMENSIONS

OUTLETS	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
2 x 3/4" BSP	MAI2587	150 x 350 x 285	6.00
3 x 3/4" BSP	MAI2588	150 x 350 x 285	5.61
4 x 3/4" BSP	MAI0380	150 x 350 x 285	6.41
5 x 3/4" BSP	MAI0381	150 x 540 x 285	11.32
6 x 3/4" BSP	MAI0382	150 x 540 x 285	9.44
7 x 3/4" BSP	MAI0383	150 x 760 x 285	17.00
8 x 3/4" BSP	MAI0384	150 x 760 x 285	13.50
9 x 3/4" BSP	MAI0959	150 x 900 x 285	21.00
10 x 3/4" BSP	MAI2185	150 x 900 x 285	16.40
11 x 3/4" BSP	MAI2186	150 x 1140 x 285	19.00
12 x 3/4" BSP	MAI2542	150 x 1140 x 285	27.50
13 x 3/4" BSP	MAI2543	150 x 1230 x 285	30.00
14 x 3/4" BSP	MAI2510	150 x 1230 x 285	32.00

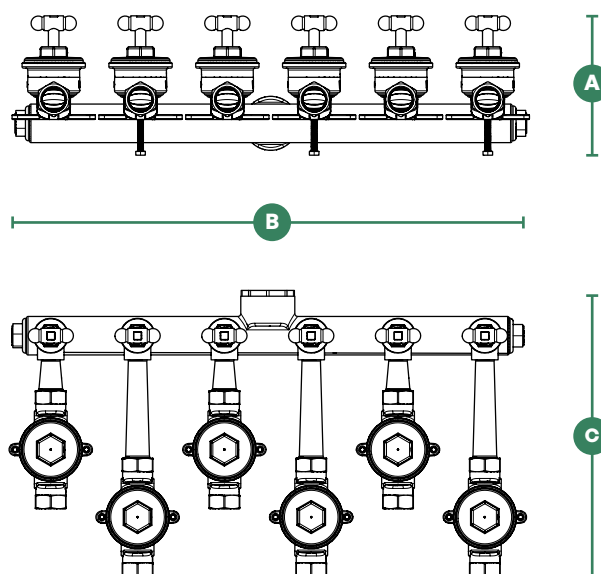

BILL OF MATERIALS

- | | | |
|--|--|---|
| 1 Headworks - Crutch
Material: BS EN 1982:2017 CC491K | 8 Headworks - Nut
Material: BS EN 1982:2017 CC491K | 15 3/4" x 3/4" Meter Carrier
Material: BS EN 12164 CW602N |
| 2 Headworks - Gland Nut
Material: BS EN 1982:2017 CC491K | 9 Headworks - O-Ring
Material: NBR (WRAS Approved) | 16 Bolt
Material: BS EN 12164 CW602N |
| 3 Headworks - Grommet
Material: NBR (WRAS Approved) | 10 Multiport Manifold Body
Material: BS EN 12164 CW602N | 17 Short Connector
Material: BS EN 12164 CW602N |
| 4 Headworks - Head
Material: BS EN 1982:2017 CC491K | 11 1.1/2" BSP Full Flow Cap
Material: Acetal (WRAS Approved) | 18 Long Connector
Material: BS EN 12164 CW602N |
| 5 Headworks - Spindle
Material: BS EN 1982:2017 CC491K | 12 O-Ring
Material: NBR (WRAS Approved) | 19 O-Ring
Material: NBR (WRAS Approved) |
| 6 Headworks - Jumper
Material: BS EN 1982:2017 CC491K | 13 Check Valve Assembly
Material: Various (WRAS Approved) | 20 End Cap
Material: BS EN 12164 CW602N |
| 7 Headworks - Jumper Rubber
Material: EPDM (WRAS Approved) | 14 O-Ring
Material: NBR (WRAS Approved) | |

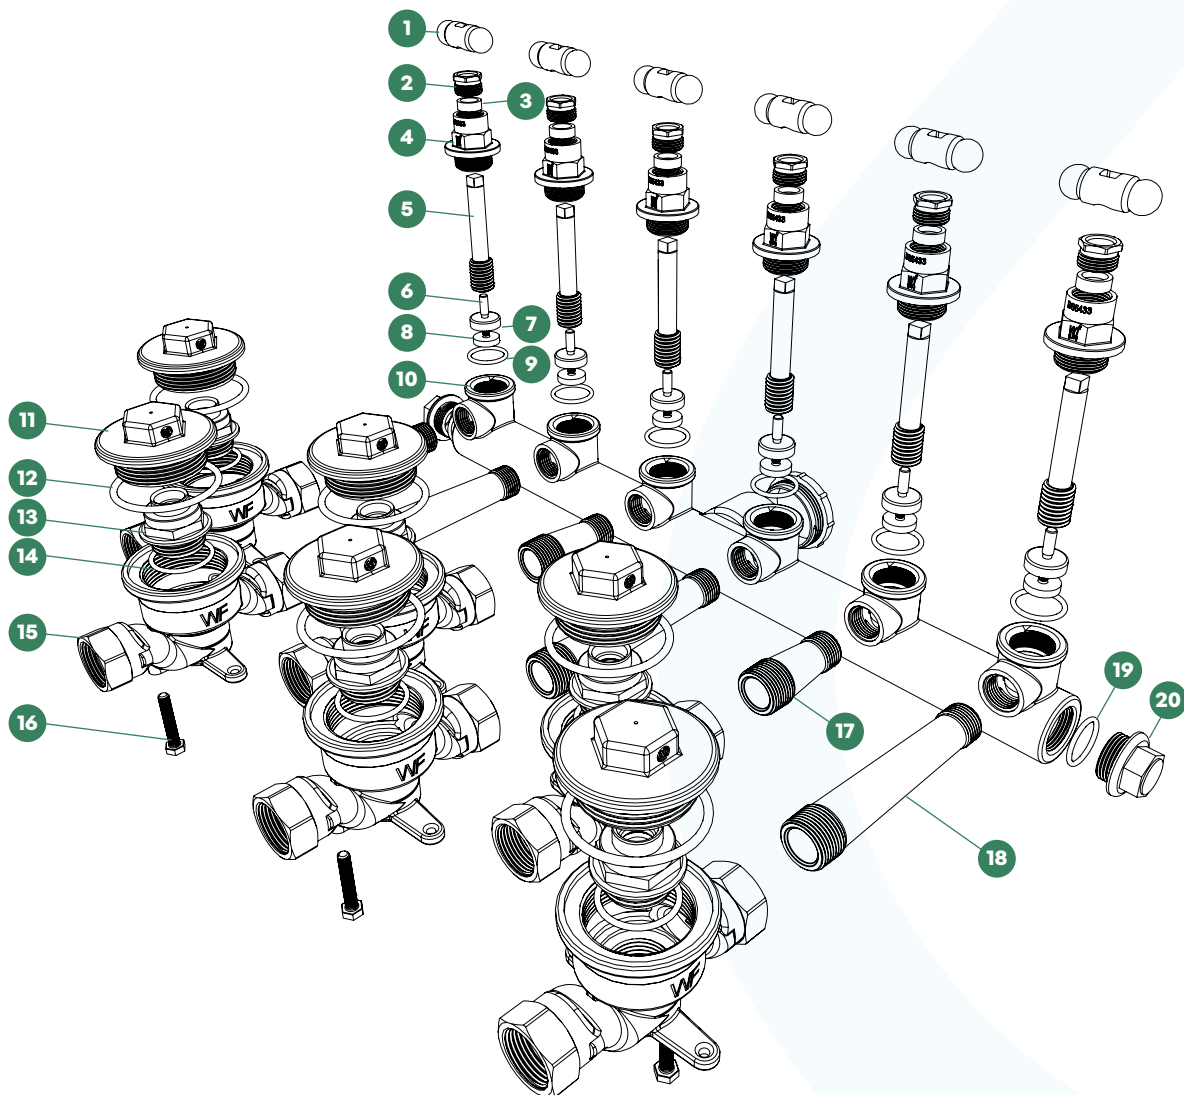

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- WRAS Approval 2310108