

STOPCOCKS


BS 5433 POLYMER PUSHFIT STOPCOCKS

waterfit




DIMENSIONS

OUTLETS	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
25mm x 25mm	SCI025002164	131 x 148 x 49	0.95
32mm x 32mm	SCI032002165	164 x 184 x 55	1.75

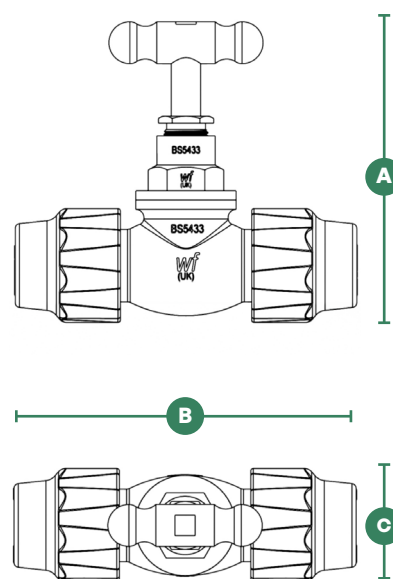

BILL OF MATERIALS

- 1 Crutch**
Material: BS EN 1982:2017 CC491K
- 2 Gland Nut**
Material: BS EN 1982:2017 CC491K
- 3 Gland Packer**
Material: EPDM (WRAS Approved)
- 4 Head**
Material: BS EN 1982:2017 CC491K
- 5 Spindle**
Material: BS EN 1982:2017 CC491K
- 6 Jumper**
Material: BS EN 2874:1986 CZ132 DZR
- 7 Jumper Washer**
Material: EPDM 85 shore (WRAS Approved)
- 8 Nut**
Material: BS EN 1982:2017 CW451K
- 9 O-Ring**
Material: Nitrile 70 shore (WRAS Approved)
- 10 Stopcock Body**
Material: BS EN 1982:2017 CC491K
- 11 O-Ring**
Material: EPDM (WRAS Approved)
- 12 Thrust Washer**
Material: Yuntianhua M90 Acetal (WRAS Approved)
- 13 Grip Ring**
Material: Yuntianhua M90 Acetal (WRAS Approved)
- 14 Liner**
Material: Yuntianhua M90 Acetal (WRAS Approved)
- 15 Protective Card**
Material: Cardboard
- 16 Pushfit Housing**
Material: Yuntianhua M90 Acetal (WRAS Approved)

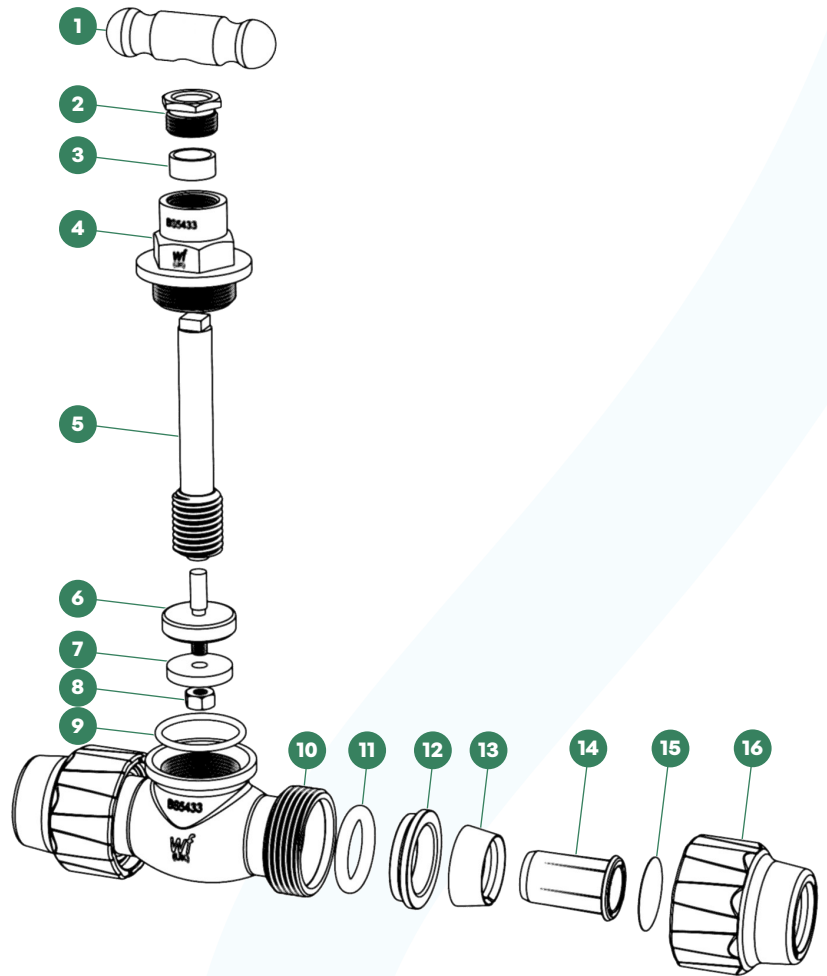

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- Conforms to BS 5433