


FERRULES

GUNMETAL PUSHFIT OUTLET

waterfit

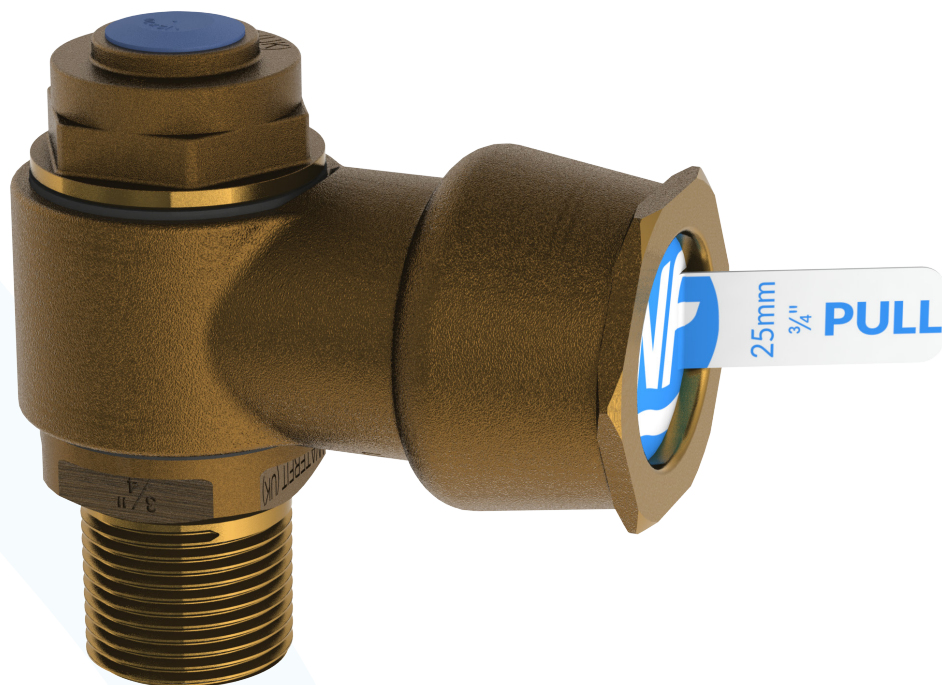


DIMENSIONS

PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
1/2" c/w 25mm Pushfit Outlet	FEI2995	80 x 80 x 41	0.46


PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
3/4" c/w 25mm Pushfit Outlet	FEI2996	80 x 84 x 41	0.50
3/4" c/w 32mm Pushfit Outlet	FEI3460	80 x 101 x 55	0.73

PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
1" c/w 32mm Pushfit Outlet	FEI2997	101 x 101 x 55	0.85

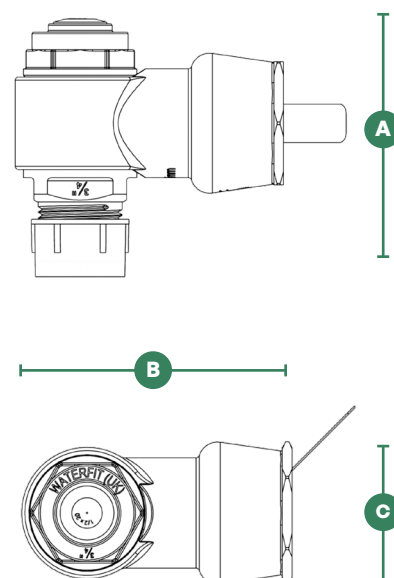

BILL OF MATERIALS

- 1 Dirt Cap**
Material: Polypropylene
- 2 Short Pattern Top Cap**
Material: BS EN 1982:2017 CC491K
- 3 Top Cap Washer**
Material: Nitrile (WRAS Approved)
- 4 Banjo Washer**
Material: Nitrile (WRAS Approved)
- 5 Gunmetal Pushfit Banjo**
Material: BS EN 1982:2017 CC491K
- 6 Plug**
Material: BS EN 12164:CW602N
- 7 Ferrule Stem**
Material: BS EN 1982:2017 CC491K
- 8 Thread Protector**
Material: Polypropylene
- 9 O-Ring**
Material: NBR (WRAS Approved)
- 10 Grip Ring**
Material: Acetal (WRAS Approved)
- 11 Pipe Liner**
Material: Acetal (WRAS Approved)
- 12 Dust Cap**
Material: Cardboard

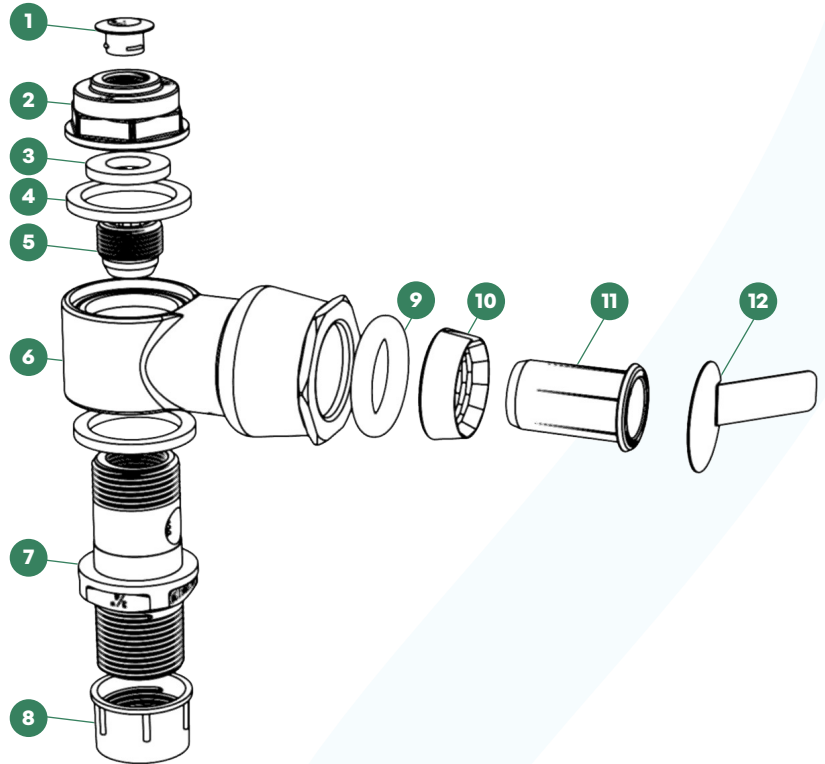

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- WRAS approved components