


SELF-TAPPING FERRULE STRAPS


POLYMER PUSHFIT OUTLET

waterfit

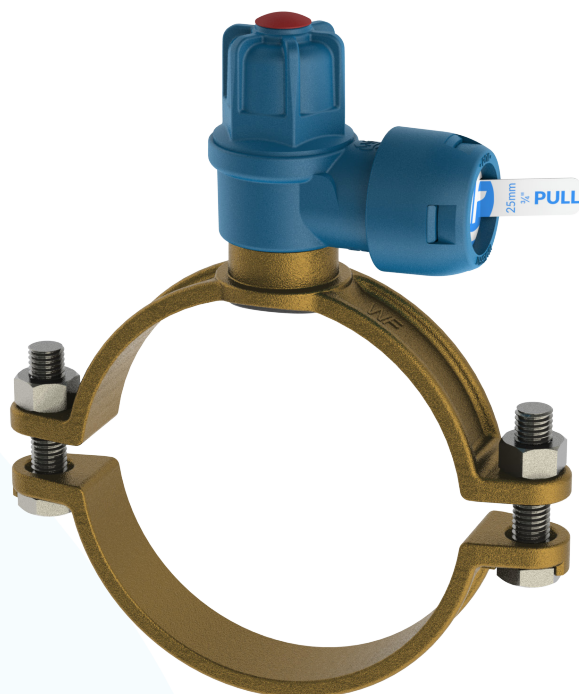


DIMENSIONS

PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
50mm c/w 25mm Pushfit Outlet	FSM0184	146 x 128 x 49	0.75
63mm c/w 25mm Pushfit Outlet	FSM0203	162 x 137 x 49	0.82
63mm c/w 32mm Pushfit Outlet	FSM0205	180 x 156 x 62	1.00
90mm c/w 25mm Pushfit Outlet	FSM0155	189 x 156 x 49	0.90
90mm c/w 32mm Pushfit Outlet	FSM0157	207 x 172 x 62	1.08
110mm c/w 25mm Pushfit Outlet	FSM0097	211 x 176 x 49	1.00
110mm c/w 32mm Pushfit Outlet	FSM0099	228 x 164 x 62	1.15
125mm c/w 25mm Pushfit Outlet	FSM0107	226 x 192 x 49	1.05
125mm c/w 32mm Pushfit Outlet	FSM0109	244 x 192 x 62	1.25
160mm c/w 25mm Pushfit Outlet	FSM2211	262 x 227 x 49	1.15
160mm c/w 32mm Pushfit Outlet	FSM2219	280 x 227 x 62	1.30
180mm c/w 25mm Pushfit Outlet	FSM0125	283 x 248 x 49	1.20
180mm c/w 32mm Pushfit Outlet	FSM0127	301 x 248 x 62	1.35

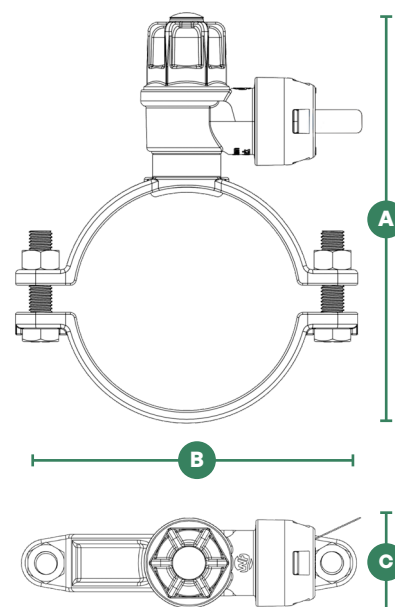

BILL OF MATERIALS

- 1 Dirt Cap**
Material: Polypropylene
- 2 Long Pattern Top Cap**
Material: Acetal (WRAS Approved)
- 3 Top Cap Washer**
Material: EPDM (WRAS Approved)
- 4 Banjo O-Ring**
Material: Nitrile (WRAS Approved)
- 5 Polymer Pushfit Banjo**
Material: Acetal (WRAS Approved)
- 6 Banjo Washer**
Material: EPDM (WRAS Approved)
- 7 Cutter**
Material: BS EN 12164: CW602N
- 8 Ferrule Strap Stem**
Material: BS EN 1982:2017 CC491K
- 9 Ferrule Strap (Top Half)**
Material: BS EN 1982:2017 CC491K
- 10 M12 Nut**
Material: A2-70 Stainless Steel
- 11 Strap O-Ring**
Material: EPDM (WRAS Approved)
- 12 Ferrule Strap (Bottom Half)**
Material: BS EN 1982:2017 CC491K
- 13 M12 Bolt**
Material: A2-70 Stainless Steel
- 14 O-Ring**
Material: NBR (WRAS Approved)
- 15 Grip Ring**
Material: Acetal (WRAS Approved)
- 16 Pipe Liner**
Material: Acetal (WRAS Approved)
- 17 Dust Cap**
Material: Cardboard
- 18 Polymer Pushfit Banjo Housing**
Material: Acetal (WRAS Approved)

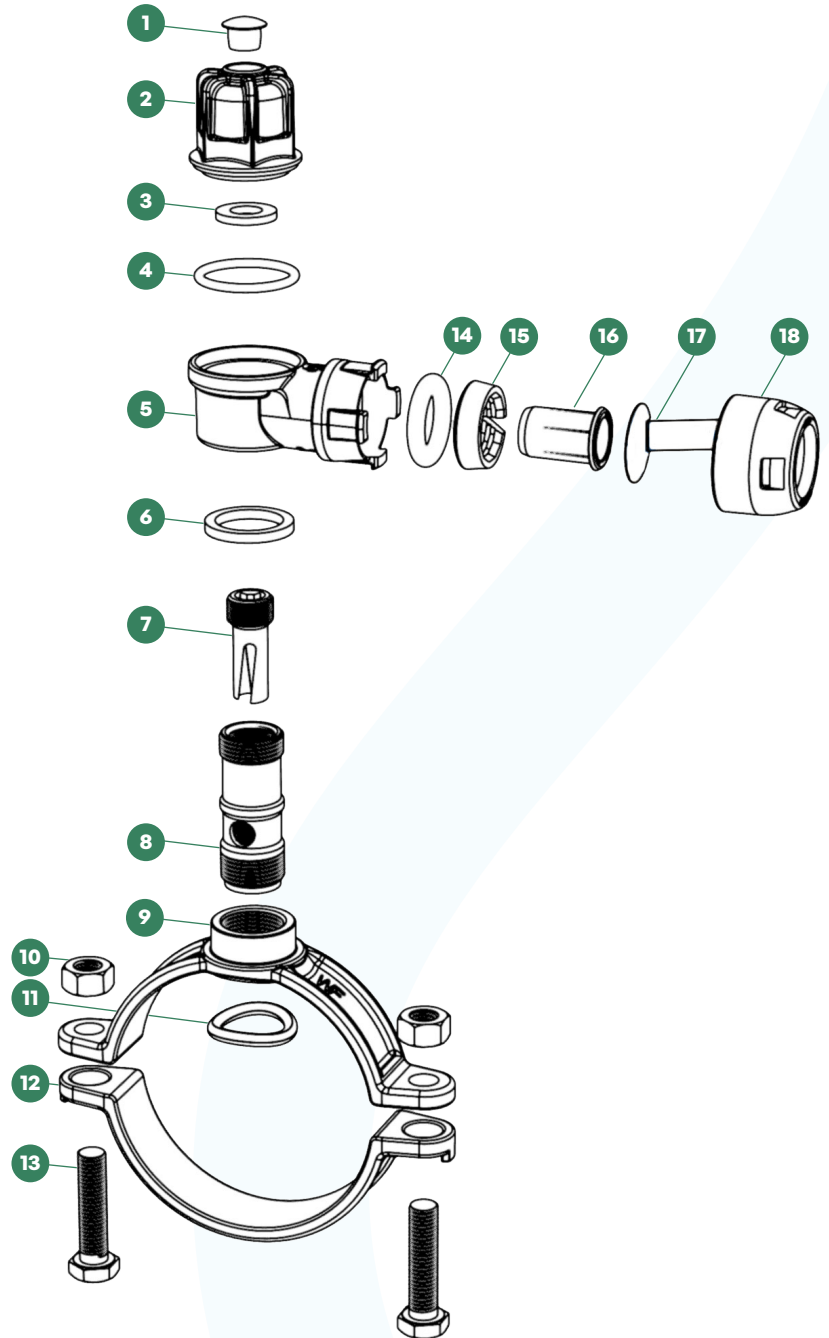

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- WRAS approved components