


SELF-TAPPING FERRULE STRAPS

GUNMETAL PUSHFIT OUTLET


waterfit

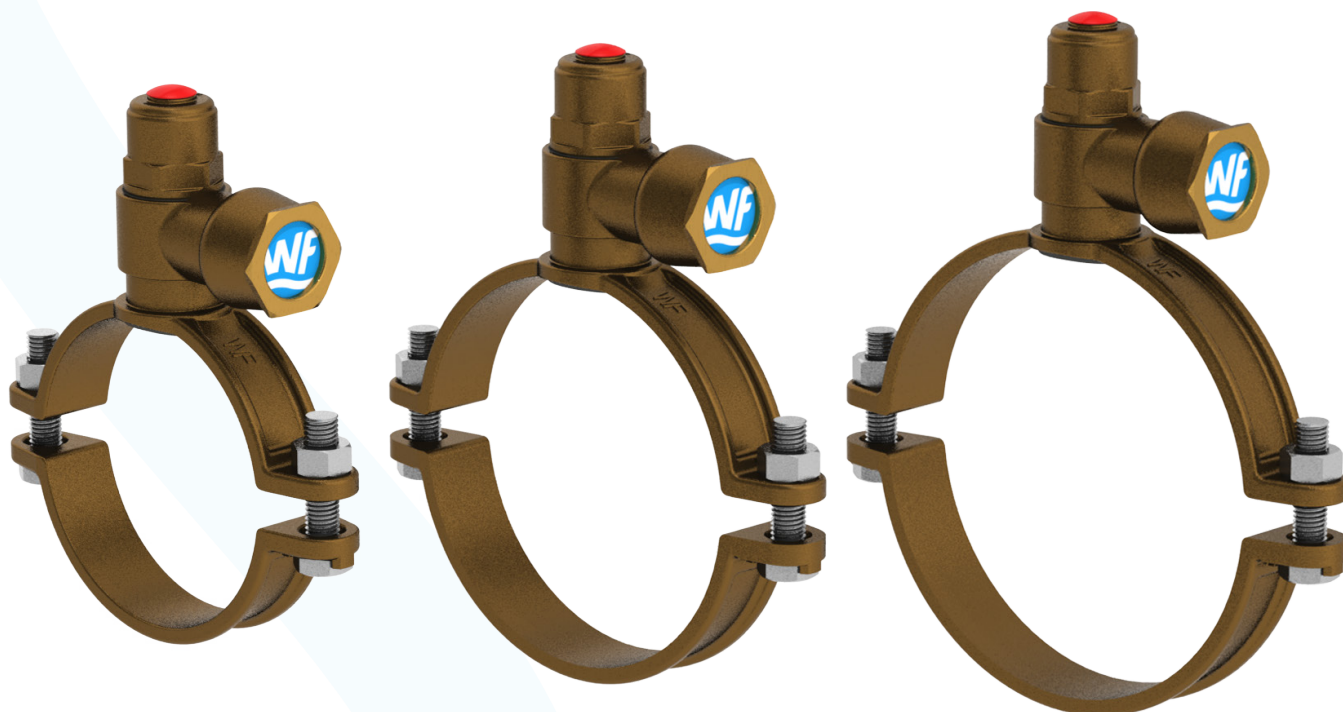

DIMENSIONS


OUTLETS	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
50mm c/w 20mm Pushfit Outlet	FSM3669	143 x 112 x 44	0.97
50mm c/w 25mm Pushfit Outlet	FSM3670	143 x 116 x 44	1.04
63mm c/w 20mm Pushfit Outlet	FSM3172	159 x 123 x 44	1.04
63mm c/w 25mm Pushfit Outlet	FSM3541	159 x 116 x 44	1.09
110mm c/w 25mm Pushfit Outlet	FSM3606	208 x 176 x 44	1.25
110mm c/w 32mm Pushfit Outlet	FSM3569	222 x 143 x 55	1.60
125mm c/w 25mm Pushfit Outlet	FSM2926	223 x 192 x 44	1.30
180mm c/w 25mm Pushfit Outlet	FSM3295	280 x 248 x 44	1.60
180mm c/w 32mm Pushfit Outlet	FSM3983	295 x 248 x 55	2.00

OUTLETS	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
3" PVC c/w 25mm Pushfit Outlet	FSI3981	186 x 156 x 44	1.14
4" PVC c/w 25mm Pushfit Outlet	FSI3849	208 x 176 x 44	1.24
6" PVC c/w 25mm Pushfit Outlet	FSI3303	259 x 227 x 44	1.50

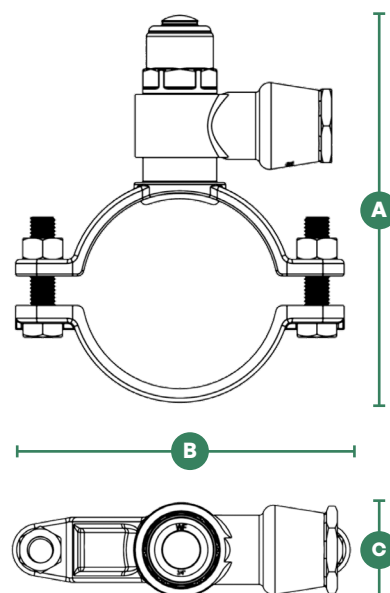

BILL OF MATERIALS

- 1 Dirt Cap**
Material: Polypropylene
- 2 Long Pattern Top Cap**
Material: Acetal (WRAS Approved)
- 3 Top Cap Washer**
Material: EPDM (WRAS Approved)
- 4 Banjo Washer**
Material: EPDM (WRAS Approved)
- 5 Gunmetal Pushfit Banjo**
Material: BS EN 1982:2017 CC491K
- 6 Cutter**
Material: BS EN12164:CW602N
- 7 Ferrule Strap Stem**
Material: BS EN 1982:2017 CC491K
- 8 Ferrule Strap (Top Half)**
Material: BS EN 1982:2017 CC491K
- 9 M12 Nut**
Material: A2-70 Stainless Steel
- 10 Strap O-Ring**
Material: EPDM (WRAS Approved)
- 11 Ferrule Strap (Bottom Half)**
Material: BS EN 1982:2017 CC491K
- 12 M12 Bolt**
Material: A2-70 Stainless Steel
- 13 O-Ring**
Material: NBR (WRAS Approved)
- 14 Grip Ring**
Material: Acetal (WRAS Approved)
- 15 Pipe Liner**
Material: Acetal (WRAS Approved)
- 16 Dust Cap**
Material: Cardboard

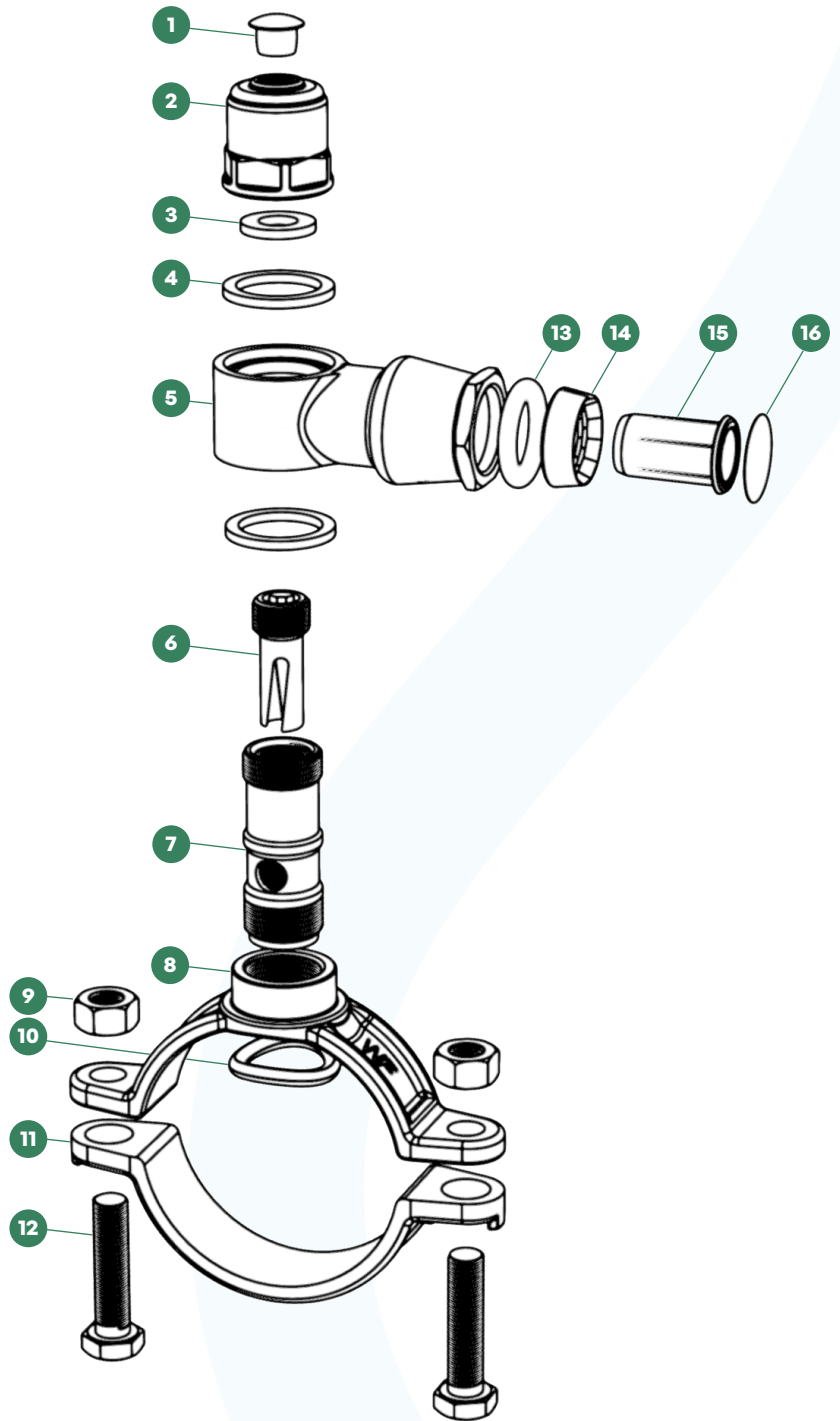

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- Conforms to WIS 4-22-02
- WRAS approved components