


SELF-TAPPING FERRULE STRAPS

MULTIFIT™ FOR CI/DI


waterfit

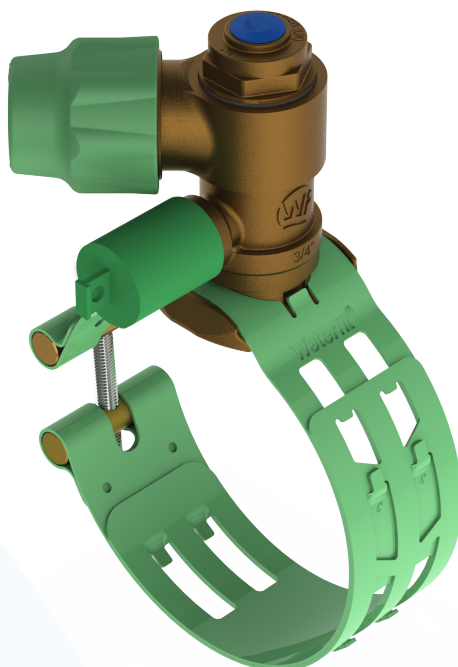

DIMENSIONS


PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
CI-DI 3-4" Strap x 25mm Combi Pushfit	MFS4532	212 x 150 x 62	1.35
CI-DI 5-6" Strap x 25mm Combi Pushfit	MFS4533	277 x 224 x 62	1.40
CI-DI 3-4" Strap x 25mm GM Pushfit	MFS4661	212 x 150 x 62	1.35
CI-DI 5-6" Strap x 25mm GM Pushfit	MFS4660	277 x 224 x 62	1.40
CI-DI 3-4" Strap x 3/4" BSP Female Iron	MFS4543	212 x 150 x 62	1.35
CI-DI 5-6" Strap x 3/4" BSP Female Iron	MFS4663	277 x 224 x 62	1.40

PRODUCT DESCRIPTION	PRODUCT CODE	SIZE (MM) (A X B X C)	WEIGHT (KG)
3/4" x 32mm GM Pushfit Banjo	SAB3461	212 x 150 x 62	1.35

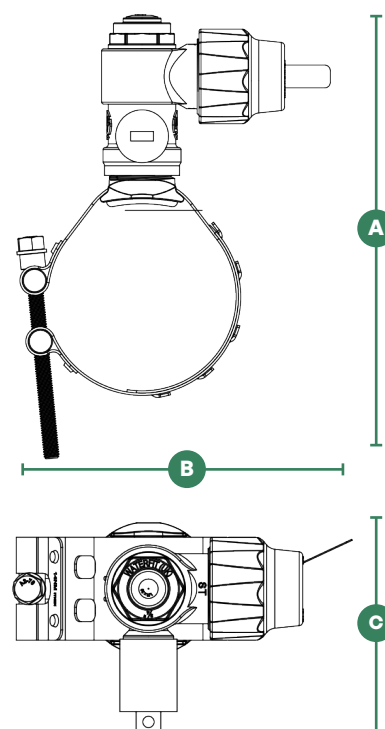

BILL OF MATERIALS

- 1 Dirt Cap**
Material: Polypropylene
- 2 Top Cap**
Material: BS EN 1982:2017 CC491K
- 3 Top Cap Washer**
Material: EPDM (WRAS Approved)
- 4 Banjo Washer x 2**
Material: EPDM (WRAS Approved)
- 5 Gunmetal Pushfit Banjo**
Material: BS EN 1982:2017 CC491K
- 6 O-Ring**
Material: EPDM (WRAS Approved)
- 7 Thrust Washer**
Material: Acetal (WRAS Approved)
- 8 Grip Ring**
Material: Acetal (WRAS Approved)
- 9 Polymer Pushfit Banjo Housing**
Material: Acetal (WRAS Approved)
- 10 Plug**
Material: BS 12164:2016 CW602N
- 11 Ported Drill Head**
Material: BS EN 1982:2017 CC491K
- 12 Unthreaded Strap Bar**
Material: BS 2874:1986 CZ132
- 13 Ball Seal**
Material: EPDM (WRAS Approved)
- 14 Ball**
Material: BS 12164:2016 CW602N
- 15 O-Ring x 2**
Material: EPDM (WRAS Approved)
- 16 Spindle**
Material: BS 12164:2016 CW602N
- 17 Locking Bush**
Material: BS 12164:2016 CW602N
- 18 Crutch Head**
Material: BS 12164:2016 CW602N
- 19 Dust Cover**
Material: PVC
- 20 Shoulder Washer**
Material: BS 12164:2016 CW602N
- 21 Multifit Strap (Top Half)**
Material: 316 Stainless Steel
- 22 Unthreaded Strap Bar**
Material: BS 12164:2016 CW602N
- 23 Multifit Boss**
Material: BS EN 1982:2017 CC491K
- 24 Strap O-Ring**
Material: EPDM (WRAS Approved)
- 25 Threaded Strap Bar**
Material: BS 12164:2016 CW602N
- 26 Multifit Strap (Bottom Half)**
Material: 316 Stainless Steel

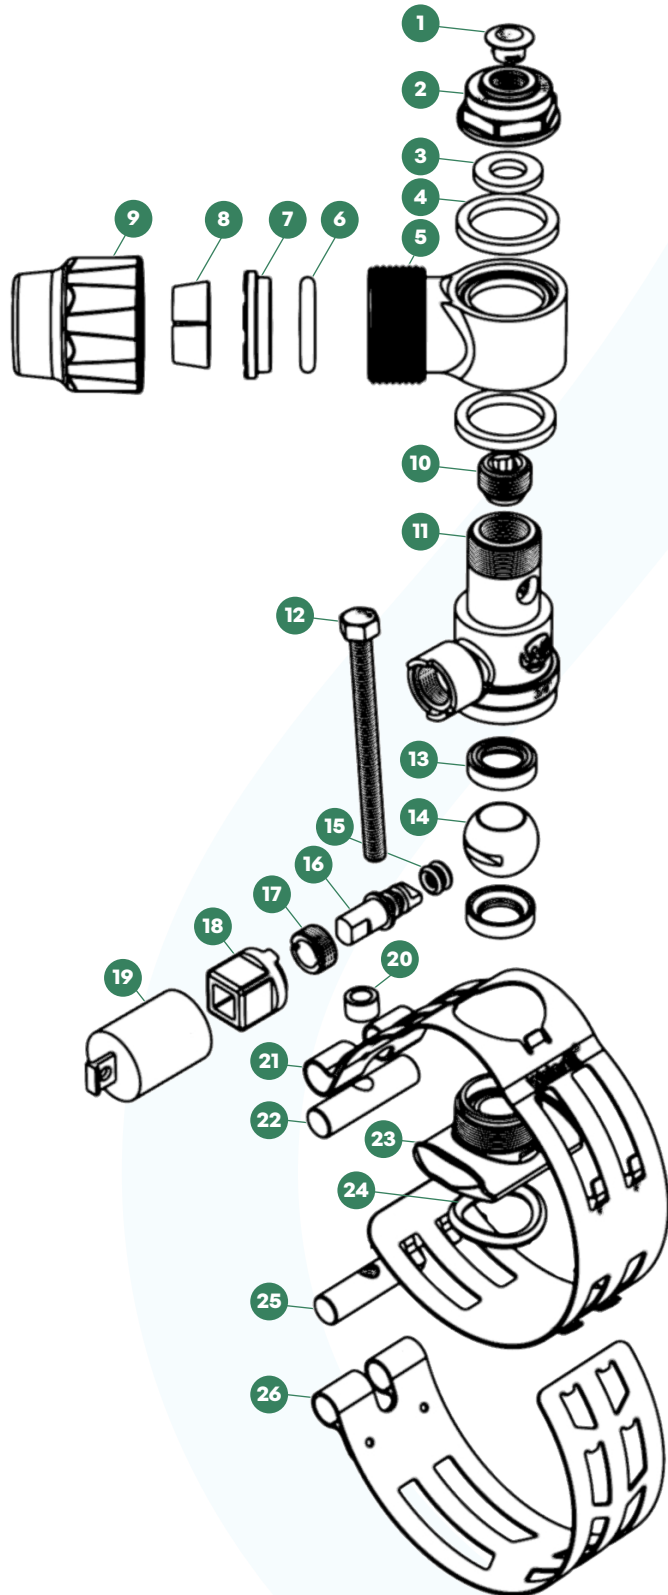

SPECIFICATIONS

- Working pressure 16bar
- Cold water use only

APPROVALS & STANDARDS

- WRAS approved components